



GOST

### Special Features

- CE & Atex approved electrical contacts
- Stainless steel case & measuring system
- Filled version available
- Standard followed in general EN 837-1

### Application

- To control the electrical operation of compressors
- Pumps
- Motors
- Presses
- Hydraulic
- Pneumatic equipments
- Chemicals
- Petrochemical plants

### Specifications

#### Standard Version : 100 mm & 150 mm

Accuracy	: ±1.0% of F. S.
Ambient temperature	: - 20°C to + 65°C
Process temperature	: Max. 100°C
Electric wiring	: DIN Connector
Contact setting	: Over on arc of 270° through a knob placed on front of lens
Operating pressure range	: 75% of Scale Value
Over pressure limit	: Not Suitable

Case & Bezel	: AISI 304 SS (Bayonet Type)
Bourdon	: AISI 316L SS
Socket	: AISI 316L SS (Directly welded to case)
Movement	: AISI 304 SS
Joints	: Tig Argon Arc Welding

Protection	: IP 65
Dial	: Aluminum, black graduation on white background
Pointer	: Aluminum, black coloured micrometer zero adjustable
Window	: Polycarbonate Dome
Electrical Contacts*	: Refer How to Order
Blow off Disc	: Neoprene
Gasket & Filling Plug	: Neoprene

\* Please specify contact set points while ordering.

#### Filled version - dielectric oil (option - ZZ)


Accuracy	: ±1.6% of F. S.
Ambient Temperature	: Maximum 65°C
Process Temperature	: +15°C / 65°C
Window	: Polycarbonate Dome
Blow off Disc*	: NBR
Gasket & Filling Plug*	: NBR
Dampening Liquids	: Dielectric Oil
Other Features	: Refer Specification of Standard Version

\*BOD, Gasket & Filling plug of Viton.


#### Temperature effect:

The variation of indication caused by effects of temperature is to be calculated by below formula; which is to be added in the specified accuracy while measurement :- Formula :  $\pm 0.04 \times (t_2 - t_1) \% \text{ of F. S.}$  where  $t_1$  = reference temperature (+20°C) and  $t_2$  = ambient temperature in °C.  
Note : The addition of mechanical electric contacts affects the accuracy of instruments such that 1% becomes 1.5%, 1.6% becomes 2.4% etc.  
(Add the 50% of accuracy; If the contact is of the magnetically assisted type, this value can't be added within the ±5% of setting point.)


## Dimensions - standard version

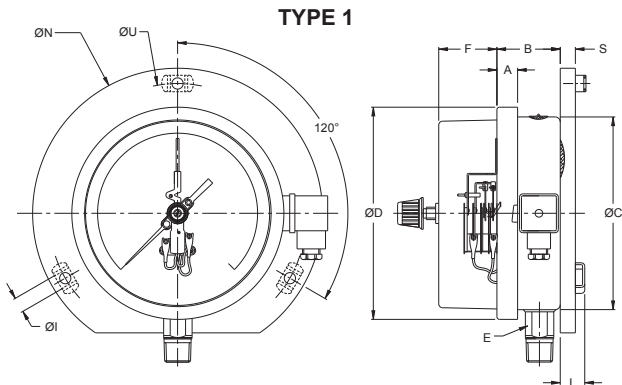


NS	A	B	$\varnothing C$	$\varnothing D$	E	F	$\varnothing I$	$\varnothing N$	$\varnothing U$	L	S	Weight in gram (With Box)
100	12.5	45	100	111	22	44	6	134	118	14.5	6	890.0
150	15	46.5	149	161	22	44	6	186	168	14.5	6	1370.0

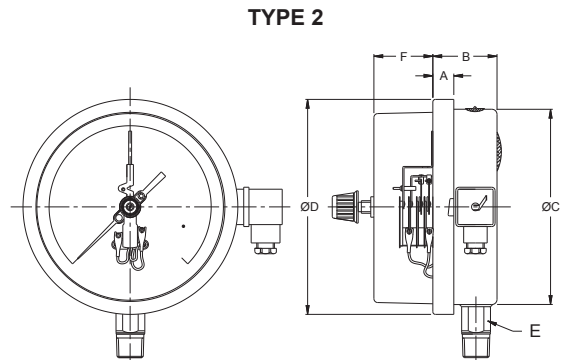


NS	A	B	$\varnothing C$	$\varnothing D$	E	F	Weight in gram (With Box)
100	12.5	47	100	111	22	44	800.0
150	15	49	149	161	22	44	1200.0

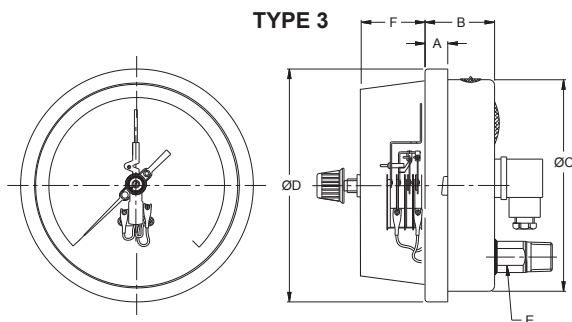


NS	A	B	$\varnothing C$	$\varnothing D$	E	F	Weight in gram (With Box)
100	12.5	47	100	111	22	44	790.0
150	15	49	149	161	22	44	1140.0

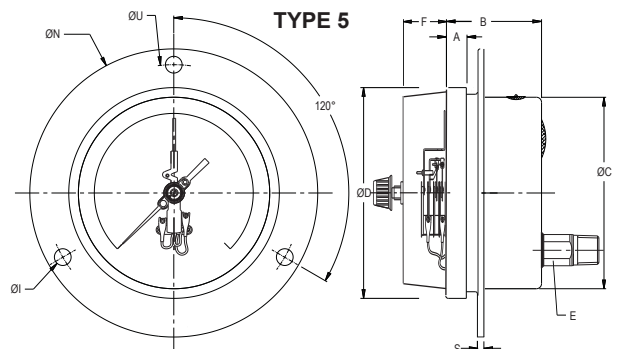

NS	A	B	$\varnothing C$	$\varnothing D$	E	F	$\varnothing I$	$\varnothing N$	$\varnothing U$	Weight in gram (With Box)
100	12.5	47	100	111	A/F 22	44	6	134	118	860.0
150	15	49	149	161	A/F 22	44	6	186	168	1300.0

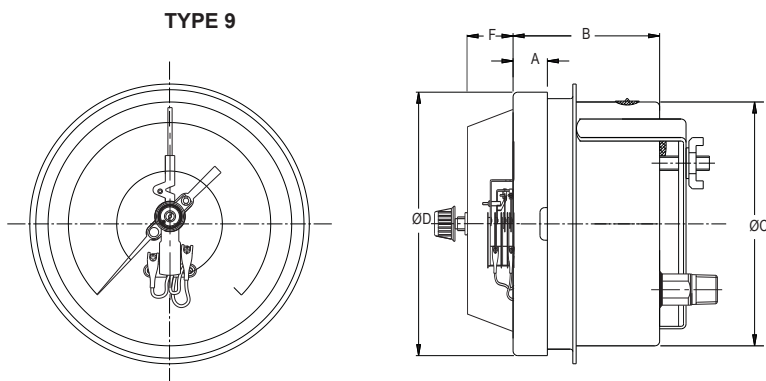





NS	A	B	$\varnothing C$	$\varnothing D$	E	F	J	K	V	Weight in gram (With Box)
100	12.5	47	100	111	A/F 22	44	72	16	108	870.0
150	15	49	149	161	A/F 22	44	106.5	16	166	1240.0

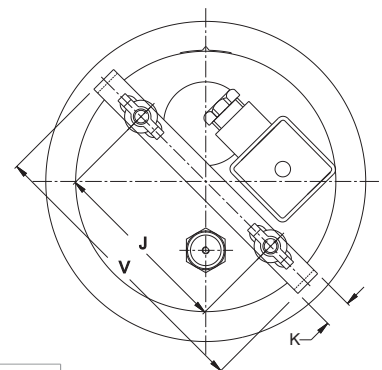









## Range Table

### Wiring diagrams for electric contacts





#### Single Contact



#### Double contact



#### Independent double contact



### Range Table

Note : We offer Pressure, Vacuum and Compound ranges in Scales like kPa, MPa, bar, psi, kg/cm<sup>2</sup> & Dual Scale like kPa with psi, kPa with bar, bar with psi or scales as per the requirement can be provided on request. Following are the example tables for kg/cm<sup>2</sup> & psi scales

#### Pressure & Compound

Pressure - single scale (kg/cm <sup>2</sup> or bar)					Compound - single scale (kg/cm <sup>2</sup> or bar)
0/1.6	0/10	0/60	0/400		
0/2.5	0/16	0/100	0/600		-1/5
0/4	0/25	0/160	0/1000		-1/9
0/6	0/40	0/250	0/1600		-1/15

#### Dual scale (psi with kg/cm<sup>2</sup>)

psi	kg/cm <sup>2</sup>	psi	kg/cm <sup>2</sup>	psi	kg/cm <sup>2</sup>	psi	kg/cm <sup>2</sup>
0/25	0/1.6	0/220	0/16	0/1500	0/100	0/10000	0/700
0/35	0/2.5	0/300	0/20	0/2200	0/160	0/15000	0/1000
0/60	0/4	0/400	0/28	0/3000	0/200	0/22000	0/1600
0/100	0/7	0/600	0/40	0/4000	0/280		
0/150	0/10	0/1000	0/70	0/6000	0/400		

#### Accessories (Refer Datasheet for complete specifications)

<b>EB</b> Cooling tower	<b>ED</b> Over load protector (gauge saver)**	<b>EG</b> Snubber
<b>EC</b> Gauge cock	<b>*</b> Needle valve	<b>EH</b> Siphon

\* Refer catalogue for Valves & Manifolds

\*\* For Pressure Ranges.

How To Order						Example
Basic Model						BJ
Code						
Nominal Size		F	H			X
		100 mm	150 mm			
Type of Mounting						X
1	Wall, surface, projection mounting with bottom entry		5	Flush panel back entry with front flange		
2	Direct bottom entry		9	Back entry with mounting bracket		
3	Direct lower back entry					
Electric Contacts ( C & Atex approved)						XX
A) Single insulated magnetic snap action type (230 V AC, 1 Amp.)(48 V DC, 0.5 Amp.)			B) Inductive type (220 V AC, 0.4 Amp.)			
RJ	Single; normally closed (1 NC)		YW	Single; normally open (1 NO)		
RK	Double; normally closed + normally open (1 NC +1 NO)		YV	Single; normally closed (1 NC)		
RL	Single; normally open (1 NO)		YX	Double; normally closed + normally open (1 NC +1 NO)		
RM	Double; normally open + normally closed (1 NO + 1 NC)		YY	Double; normally open (both NO)		
RN	Double; normally closed (both NC)		YZ	Double; normally closed (both NC)		
RO	Double; normally open (both NO)		ZA	Double; normally open + normally closed (1 NO + 1 NC)		
RU	Booster with relay for current upto 5 Amp.					
RA	SPDT					
RC	DPDT					
Gauge Connection						XXX
3BM	3/8" BSP (M) Standard	2NM	1/4" NPT (M)	4TM	½" BSPT (M)	
4BM	½" BSP (M) Standard	4NM	½" NPT (M) Standard	4MM	M20 x 1.5 (M)	
Note : Connections like Metric/ PT/ PF/ Flaired/ UNF/ G/ R etc can be provided on request.						0/10 kg/cm <sup>2</sup>
Range						
Refer range table						
Options						XX
TI	Monel bourdon & socket (Monel version)**		TF	Conformity as per NACE standard		
PS	AISI 316 SS case & bezel*		RH	Custom designed dial##		
PW	Five point calibration certificate		QB	Integral dampening screw (AISI 316 SS)		
ZZ	Dielectric oil filled#		FL	Integral dampening screw (Monel)**		
SX	SS tag plate		SA	Internal overpressure stop		
SW	Dial tag marking		SB	Internal vacuum stop		
TB	Helium leak test		SF	Movement with dampening jelly		
GH	Material test certificates***					

\* Consult factory for minimum order quantity & delivery. # BOD, gasket & filling plug of Viton.

\*\*Integral dampening screw will be in monel if ordered. Refer option FL. ## Consult factory for dial design approval.

\*\*\* Material test certificates will be provided for wetted parts only with chemical composition testing. For others, Please consult factory.

### Ordering Example: BJ . X . X . XX . XXX . 0/10kg/cm<sup>2</sup> . XX

For other optional items, please contact factory for delivery and minimum quantity of order.

Note : Specifications and dimensions given in this product catalogue represents the state of engineering at the time of printing.

Modifications may take place and materials specified may be replaced by others without prior notice.